


# GGX125 AST Grease Guardian Installation Details

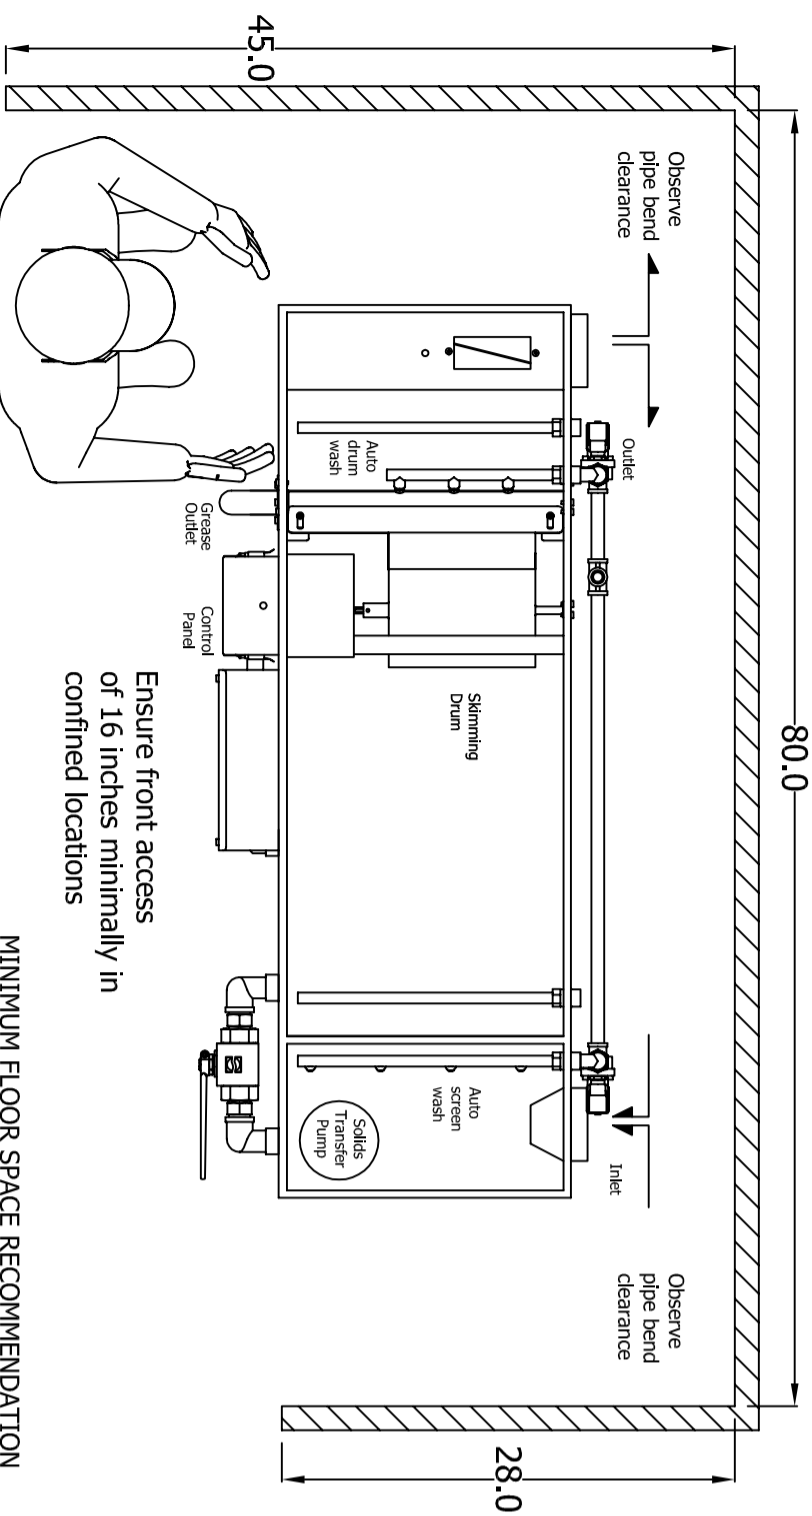

**KEY INSTALLATION NOTES:**

This unit is to be installed free standing normally at a lower level than the kitchen floor.  
 Allow for the minimum dimensions shown.  
 Keep outlet piping at a fall of  $\frac{1}{8}$ " per foot (1:40).  
 Use adjustable rubber pipe connectors as supplied.  
 Only switch on after filling system to the required level  
 Refer to manual for full installation details.

**SPECIFICATION:**

Grease Guardian Model GGX125AST:  
 Self cleaning automatic grease removal unit, 16 gauge fully welded 304 stainless steel tank, stainless steel internal baffle plate, fully sealed air tight stainless steel lid and robust stainless steel clamps, stainless steel vertical lift solids strainer mesh plate, easy fit pipe couplings supplied, 125 gallons per minute flowrate, and skimming rate of 20 pounds per hour. The GGX125 AST is supplied with an automatic solids transfer (AST) pump with integral automatic screen wash system, rotating grease skimming drum with automatic internal wash system, air pump for wash-water conditioning, integral gas trap, totally enclosed geared drive unit, two 600 watt immersion heaters with self regulating safety control, programmable controller with interfacing, energy saving mode and visual alerts. The GGX125 AST is suitable for floor and shelf type mounting. 3 year warranty as standard.

**Electrical Details**

GGX125AST 110Vac, 1710 Watts, 18.4A\*

**PRE START CHECK UP:**


Ensure unit is positioned on a level surface and is plumbed in securely.  
 Ensure electrical outlet is fitted with dedicated ground fault circuit breaker.  
 Ensure that the unit is filled with water to the correct level.  
 Set correct controller date and time as detailed in the manual.  
 Ensure that collection receptacle is empty and securely in place.

**GREASE GUARDIAN WORLD:**

Grease Guardian World is an interactive online register of all Grease Guardian branded products uploaded and managed by Grease Guardian, distributors and end users.  
 Grease Guardian World allows users to:

- Upload and manage individual sites
- Monitor specification, service history, supplier details for each Grease Guardian installed
- Upload and view installation photographs
- Upload and view Operation & Maintenance manuals
- Upload and view service engineer reports
- Locate sites using Google Maps linking
- Access and manage accounts on-line
- Manage recycled fats, oils and greases (FOGs)

# GGX125 AST Grease Guardian Standard Specification

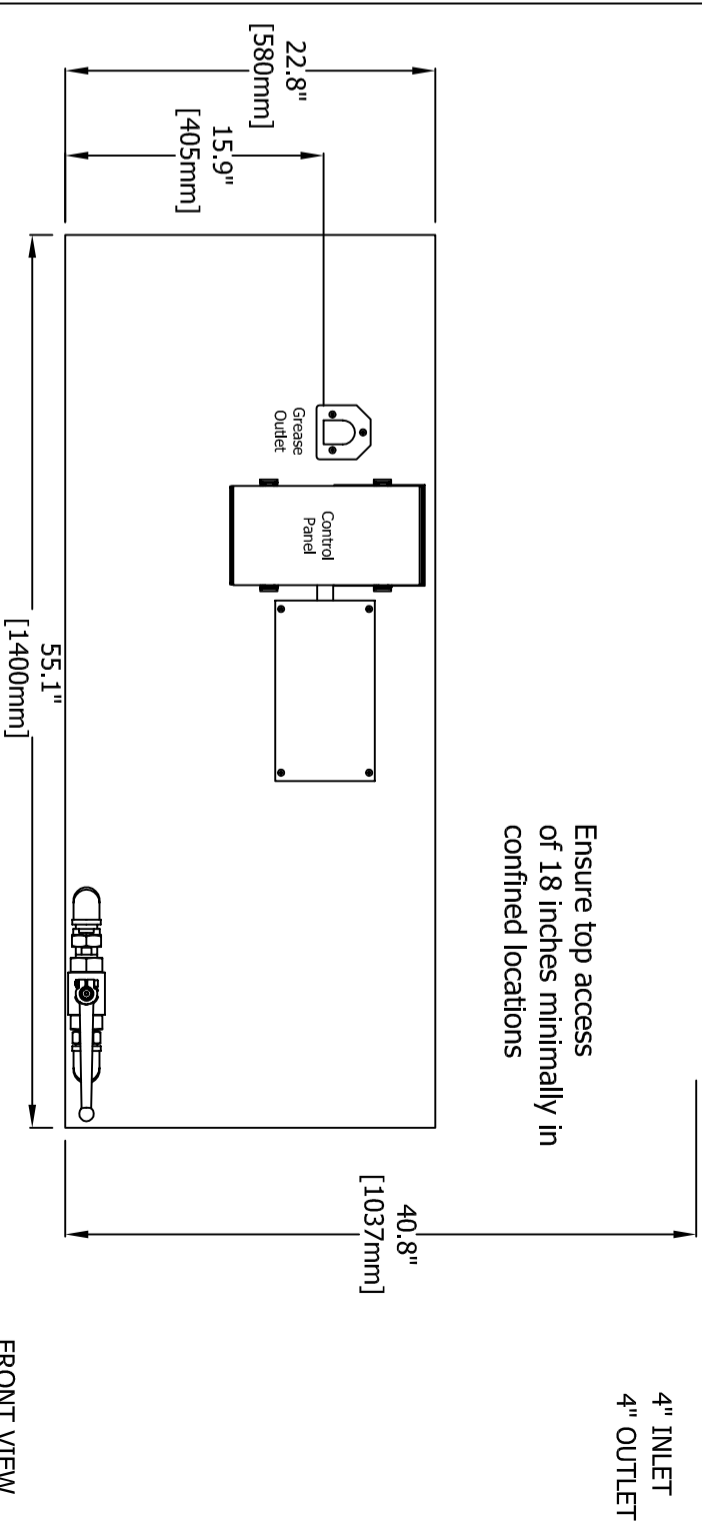

**GREASE GUARDIAN X AST  
STANDARD FEATURES:**

- 3 Year Guarantee
- Fully Automatic Grease Removal Unit (AGRU)
- 16 gauge 304 stainless steel welded tank
- Fully sealed air tight lid
- PLC/HMI automatic controller
- Energy saving mode
- Skimming drum with automatic spray bar wash
- Airp pump for wash-water conditioning
- Automatic screen mesh spray bar wash
- Automatic Solids Transfer (AST) pump
- Grease Guardian World asset management

**TECHNICAL DATA**

Weight 290 pounds

Exterior Materials 16 gauge AISI304 Stainless Steel

Interior Materials AISI304 Stainless Steel & Acetal Components

Maximum Flow Rate 125 GPM

Solids transfer pump rating (flow/head max) 70gpm/13.5psi (16m3h/9.5m)

Skimming Rate 20 pounds per hour

Grease Retention Capacity 300+ pounds

Wash water system operation requirements (minimum) 12gpm/43.5psi (0.75ftres/s@3bar)

Programming/Control 7day, 24hr multi-function PLC

Electrical Load 110VAC, 1710W, 18.4A max\*

\* Current absorbed depends on pump discharge head