



D3 Grease Guardian Specifications

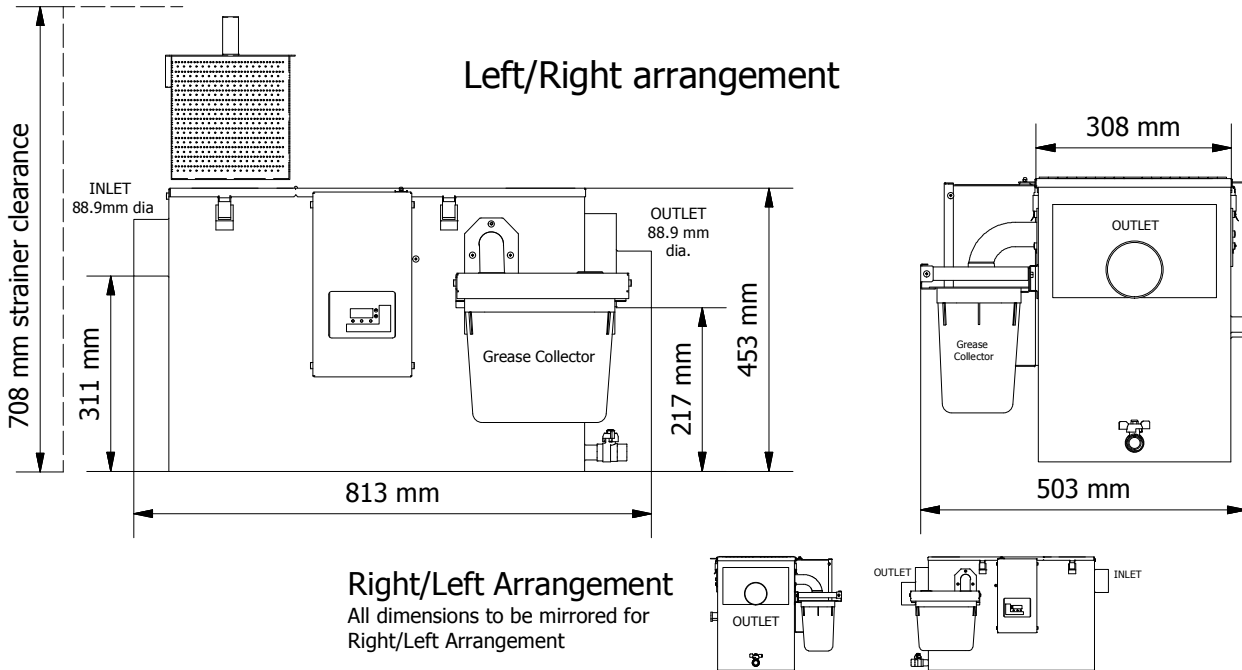

Minimum Footprint Dimensions

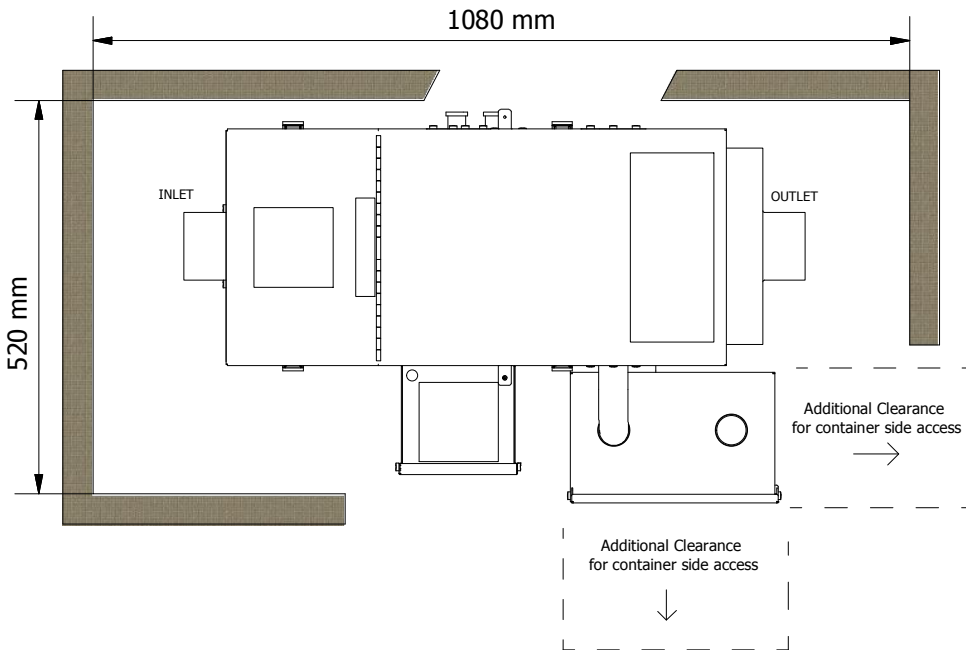

Allow for the minimum clearances shown

Allow additional 150mm length clearance for outlet sampling port where applicable

Grease Collector is front loading/side loading optional. Standard supply is front loading

TECHNICAL DATA

Weight	33 KG
Material	Exterior, 16 gauge stainless steel, bright finish
Interior	Stainless Steel and Acetal Plastic Components
Maximum Flow Rate	1.75 litres per second
Number of skimming wheels	1 to 3 optional
Solid Strainer Capacity	8 litres
Skimming Rate (standard unit)	4 per hour/wheel
Programming/Control	24 hour, 7 day, multi functional digital
Electrical Load	230VAC, 1025 Watts 4.46 AMPS