


GT4 Grease Interceptor passive/biological specification

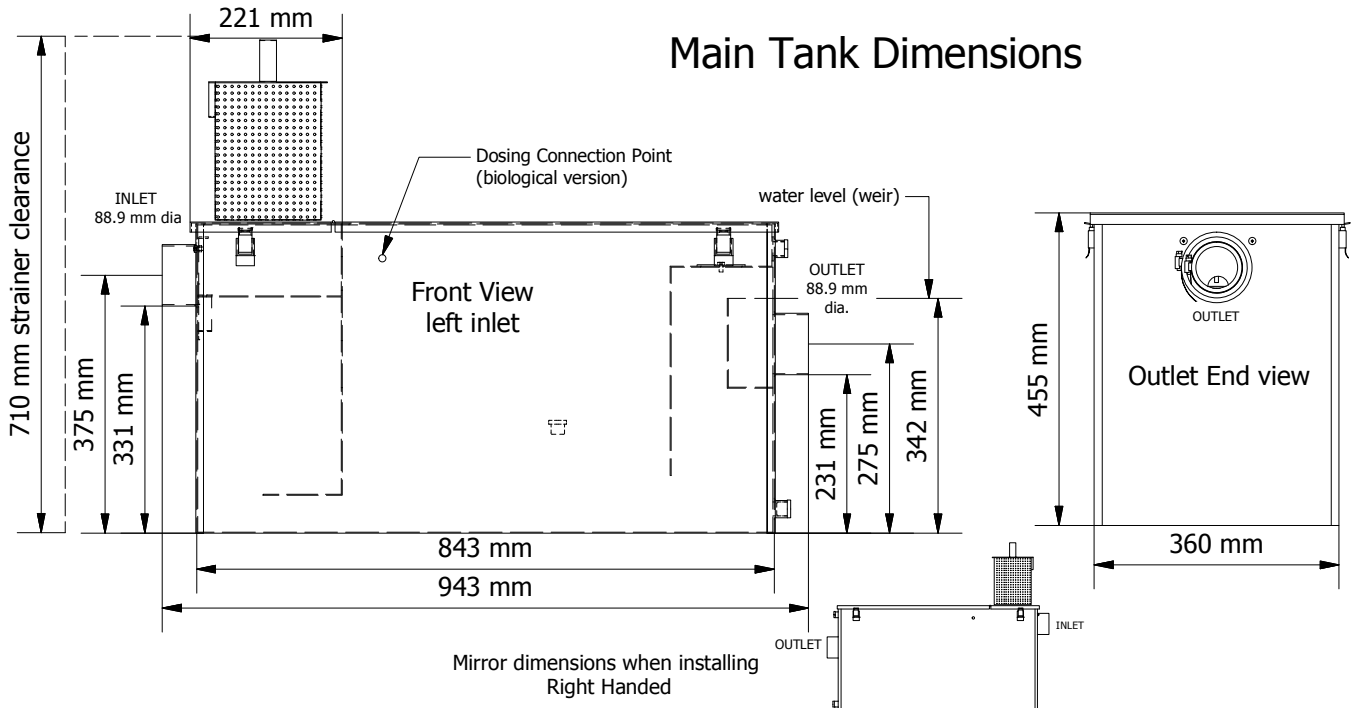

Minimum Footprint Dimensions When Installed


when using 3-2 inch pipe reducers

NOTES:

Allow for the minimum clearances shown including plumbing bend attachments (excluded)

Allow additional 150mm length clearance for outlet sampling port where applicable

Ensure access to strainer basket, located at inlet side of unit

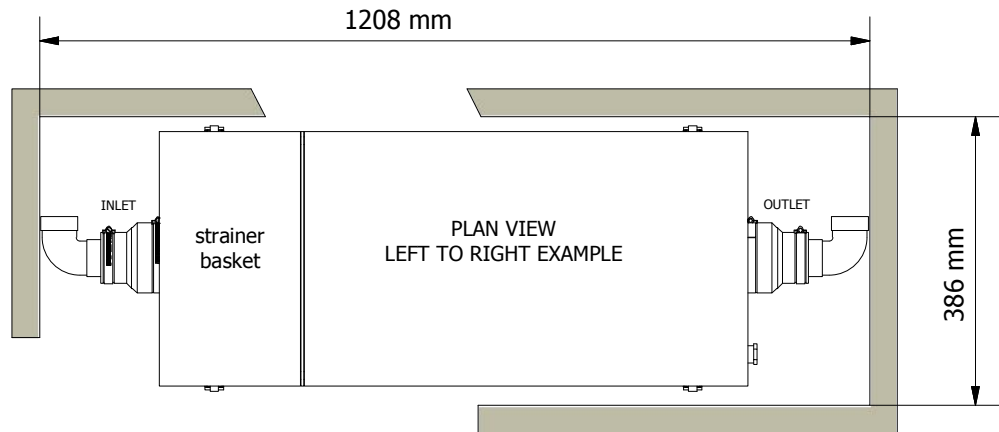

TECHNICAL DATA

| | |
|---|-------------------------------------|
| Weight | 30 KG |
| Tank Material | stainless steel, 1.5mm, X6 CrNi1810 |
| Meals per Day Rating | 180 |
| Maximum sink capacity served | 170 litres |
| Maximum Flow Rate served | 2.75 litres per second |
| Grease Retention Capacity | 42.5 kg |
| Solid Strainer Capacity | 10.0 litres |
| Strainer Basket maintenance | Empty 1-2 times daily |
| Tank Pump out Frequency - passive unit | 1 x 15 days |
| Tank Pump out Frequency - biological unit | 1 x 60 days |
| Fluid dosage rate - biological unit | 10.8 litres per month |

Sizing data is calculated using ASME 112.14.3 & PDI G101 standards