


MGT3B manual marine Grease Interceptor  
Dimensions in mm

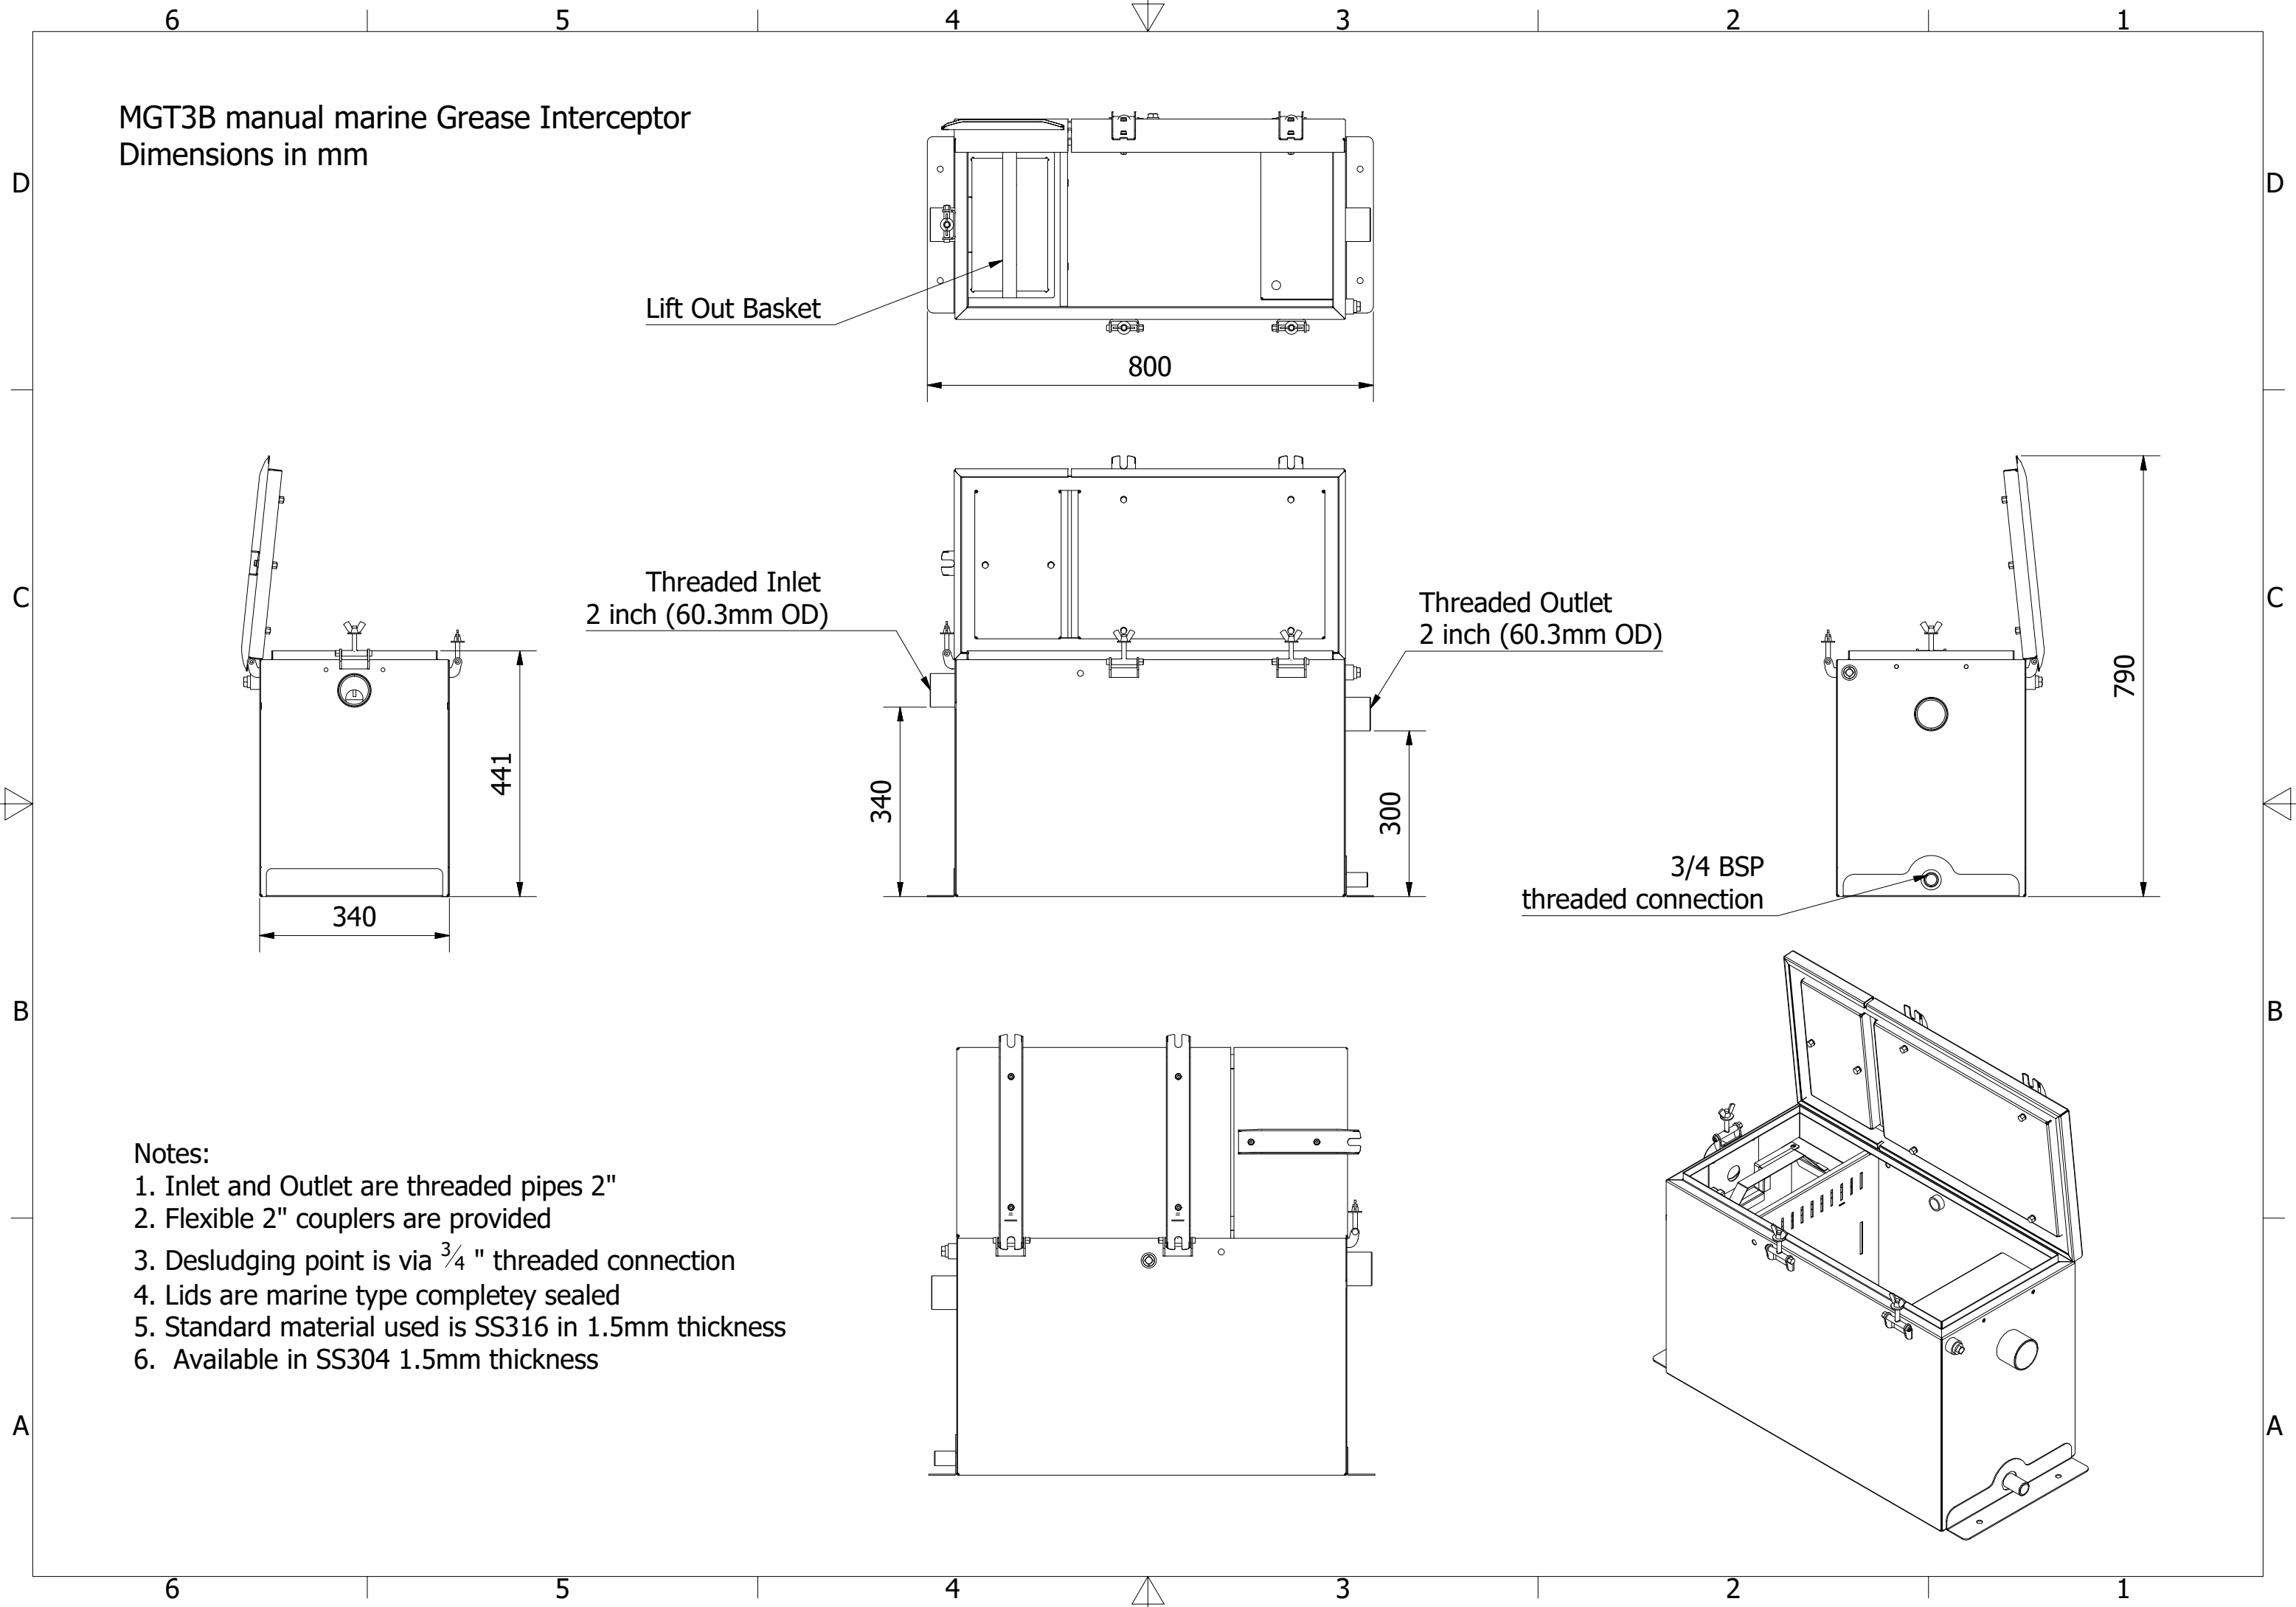

Notes:

1. Inlet and Outlet are threaded pipes 2"
2. Flexible 2" couplers are provided
3. Desludging point is via 3/4" threaded connection
4. Lids are marine type completely sealed
5. Standard material used is SS316 in 1.5mm thickness
6. Available in SS304 1.5mm thickness