MGT2 Marine Grease Guardian

Stock Code: MGT2

Allow + 210mm clearance to open lid and lift out strainer

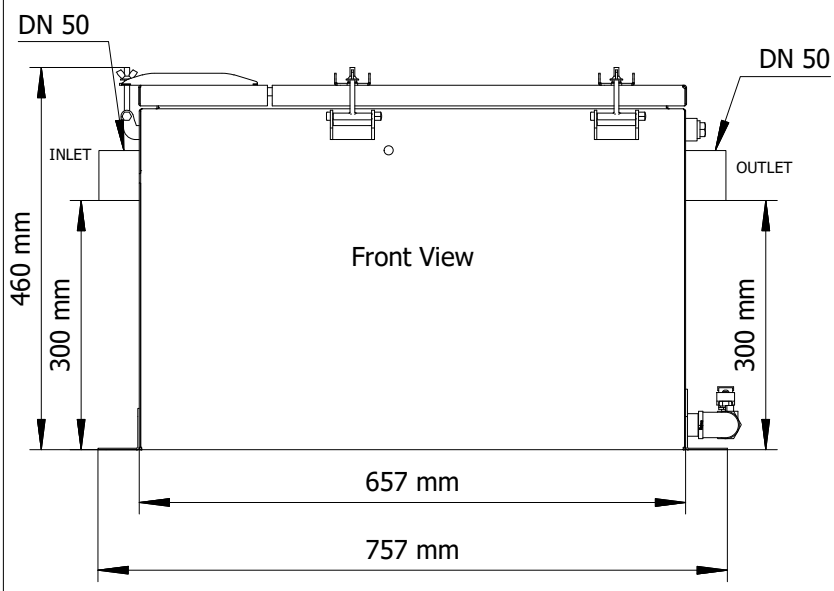

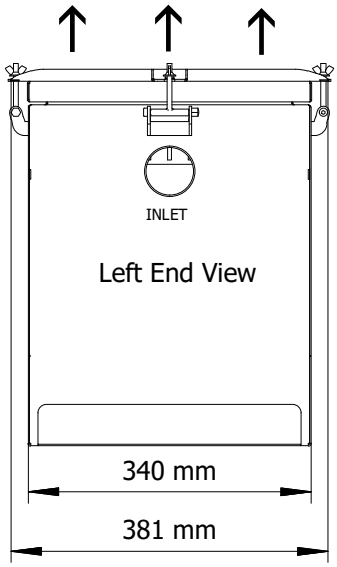

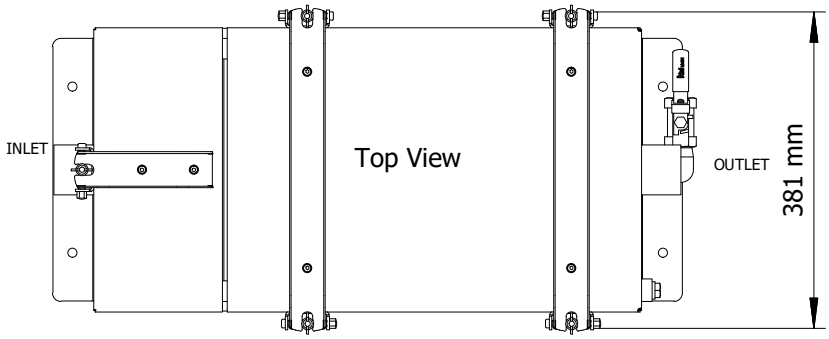

Standard Features

- Internal dry solids strainer (lift out)
- Marine grade Tank Lid
- Quick Fit rubber couplings
- 3 year guarantee

Exclusions:

- Pipework beyond inlet/outlet couplings /ventilation piping

Options: by FM Environmental on request:

- Dosing pump system and solution for grease treatment
- Upstream coarse solids strainer modules
- Flanged inlet and outlet port upgrade
- Externally mounted blower system (for surface scum dispersal)

Key Installation Notes:
Allow for the minimum clearances shown, include clearance for pipe connections and user access to front of unit

Unit should be plumbed at a gravity fall (1:40 for maximum perfornance)

Observe all regional plumbing regulations for pipe venting, trapping.
Observel safety and hygiene regulations

Note: Not to be treated as an installation guide. Installation guide in full is issued on supply of system.

TECHNICAL DATA

Weight	30 kg (empty)
Material	Exterior, 16 gauge stainless steel 316, bright finish
Tank Capacity	66.1 litres
Maximum Flow Rate	1Litre per Second
Solid Strainer Capacity	3 litres

Copyright January 2024 FM Environmental Ltd. All Rights Reserved. Specification subject to change without notice