
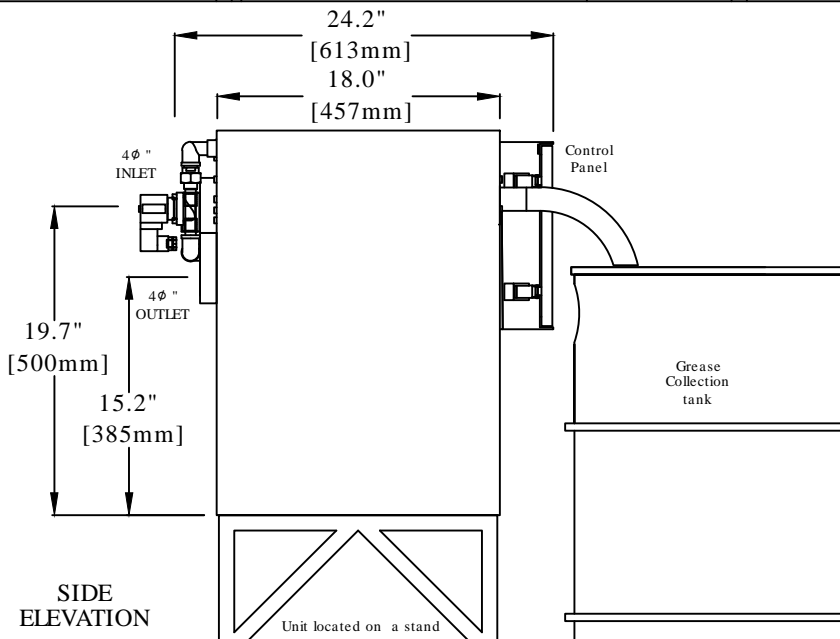


# GGX125 Grease Guardian Standard Specification

DN100 INLET (114.3mm OD pipe)  
DN100 OUTLET (114.3 OD pipe)  
38mm OD GREASE OUTLET pipe

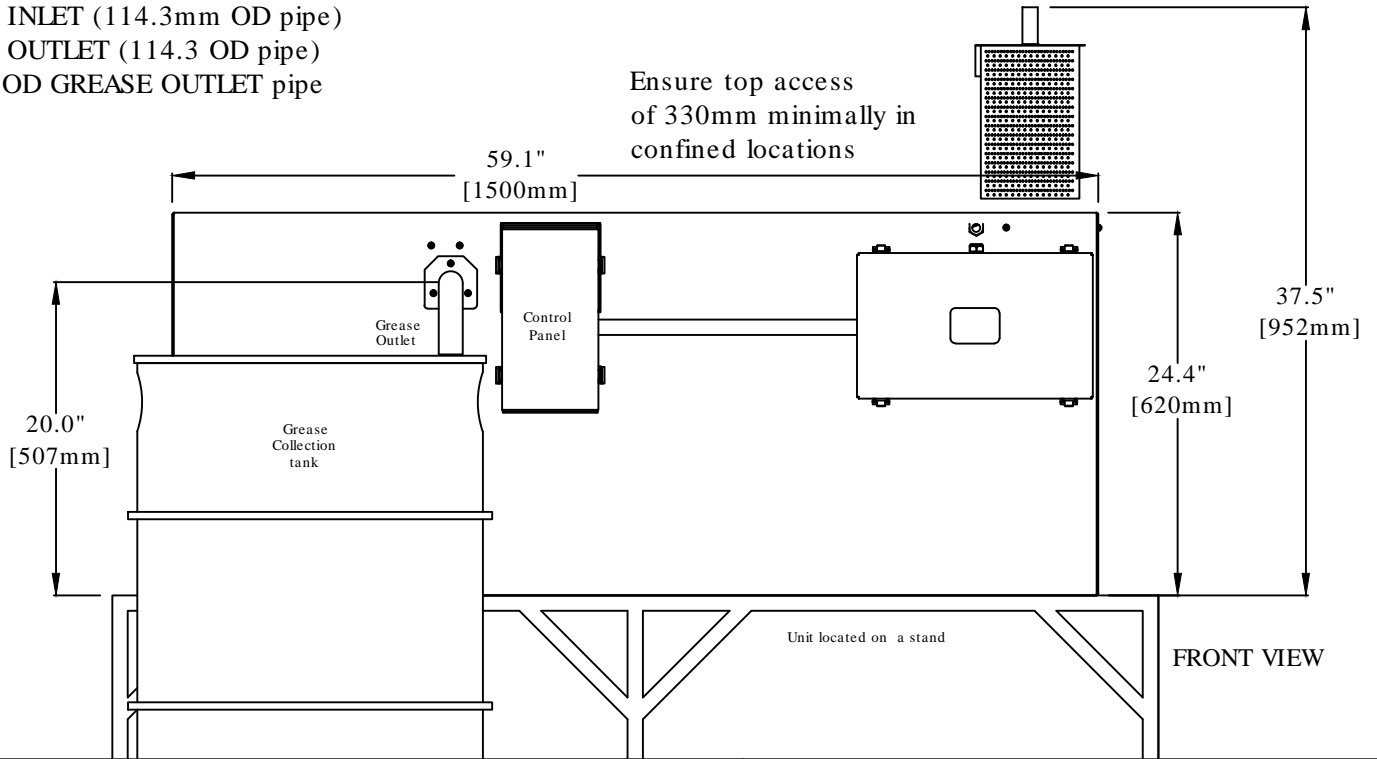

## GREASE GUARDIAN X STANDARD FEATURES:

- 3 Year Guarantee
- Fully Automatic Grease Removal Unit (AGRU)
- 14 gauge 304 stainless steel welded tank
- Fully sealed air tight lid
- PLC/HMI automatic controller
- Energy saving mode
- Skimming drum with automatic spray bar wash
- Automatic wash-water conditioning system
- Lift-out solids basket
- Grease Guardian World asset management

## TECHNICAL DATA

Net weight (empty)	117 kgs
Gross weight (filled with water)	411 kgs
Tank capacity	294 litres
Exterior Materials	14 gauge AISI304 Stainless Steel
Interior Materials	AISI304 Stainless Steel & Acetal Components
Maximum Flow Rate	7.9 litres/s
Lift-out screen basket capacity	14 litres
Skimming Rate	10 litres per hour
Grease Retention Capacity	138+ litres
Hot wash water system operation requirements	minimum 0.75litres/s @ 3-6 bar (temp 40-60 °C)
Programming/Control	7day, 24hr multi-function PLC
Electrical Load	230VAC, 2100W, 9.1A